


**BIROL ISITMA VE SOGUTMA A.S.**

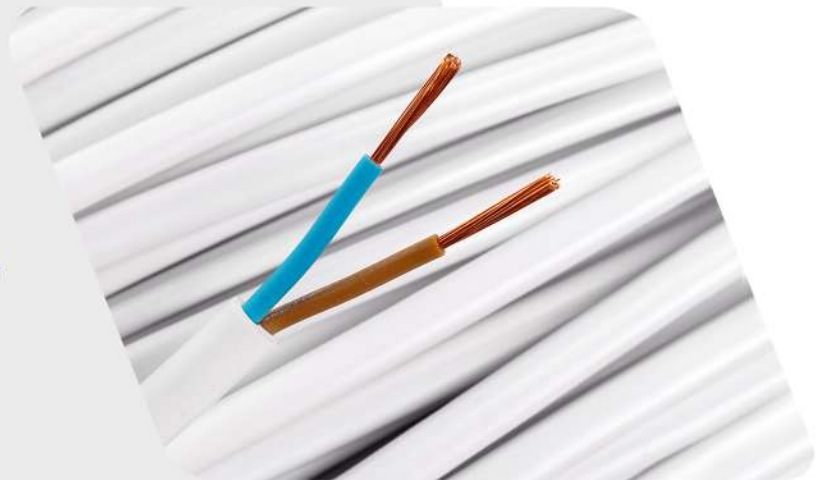

 **BRISCOOL**

[www.briscool.com.tr](http://www.briscool.com.tr)

EFFICIENT SOLUTIONS  
FOR YOUR **HEATING**  
AND **COOLING** SYSTEMS



**WE ARE ALWAYS  
WORKING**

*For the better*



## OUR CONTENTS

- 01** WHITE PRE-INSULATED COPPER TUBES
- 03** DOUBLE WHITE PRE-INSULATED COPPER TUBES
- 05** BLACK PRE-INSULATED COPPER TUBES
- 07** DOUBLE BLACK PRE-INSULATED COPPER TUBES
- 09** ANTI-UV FIREPROOF PE INSULATED COPPER TUBES
- 11** RUBBER PRE-INSULATED COPPER TUBES
- 13** PRE-INSULATED COPPER TUBES PRODUCT CATEGORIES
- 15** TRANSPORTATION
- 17** COPPER MONTAGE KITS
- 21** STRAIGHT COPPER TUBES
- 23** MEDICAL COPPER TUBES
- 25** LWC LEVEL WOUND COILS
- 27** PANCAKE COPPER TUBES
- 29** COPPER FITTINGS ELBOW-P TRAP-COUPLING-TEE
- 31** TUBE FORMING
- 33** BRANCH PIPES
- 34** CLIMA BRACKETS
- 35** DRAIN HOSES
- 37** H05VV-F ELECTRIC CABLES (TTR)
- 39** SIGNAL CABLES (LIYCY)
- 40** SIGNAL CABLES (LIHCH)
- 41** H05V-U/H07V-U/H07V-R CABLES (NYA)
- 42** H05V-K/H07V-K CABLES (NYAF)

# ABOUT US



Briscool Heating and Cooling Inc. with the experience of being the leading company in the sector since 1986, it offers quality, reasonable prices and the best service to our valued customers.

Briscool, In the sectors we have been operating for 37 years; Briscool is to provide the highest benefit to its customers, employees and managers as a company that respects the individual and society, adheres to the law, economic and ethical principles, and is sensitive to safety and environment.

Briscool always gives you full support in the field of HVAC-R with pancake copper tubes, straight pipes, LWC pipes, rubber or polyethylene insulated pipes, installation kits, drain hoses, air conditioner brackets, cables (H05VV-F, LIHCH, LIYCY, NYAF, NYA) and copper fittings.



# PRE-INSULATED COPPER TUBES

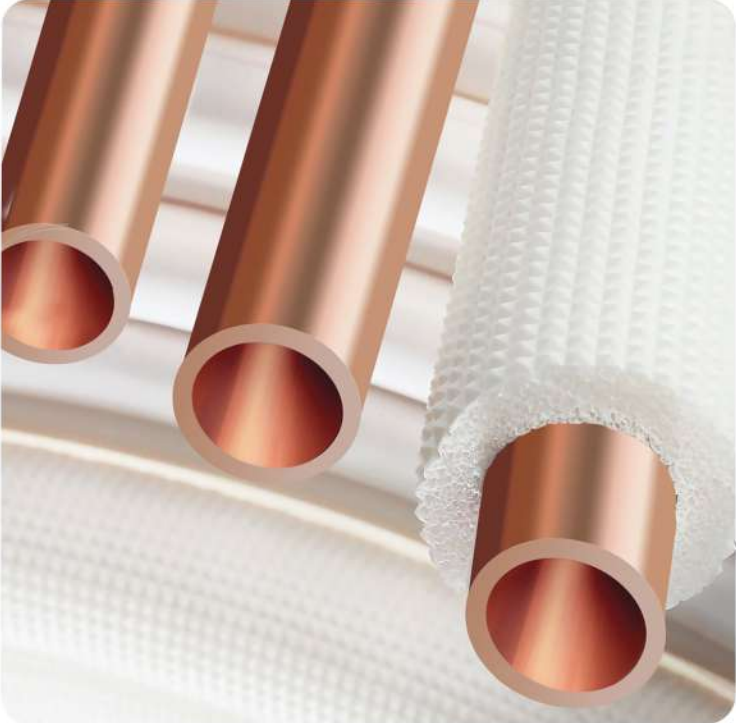

# BRISCOOL WHITE PRE-INSULATED COPPER TUBES

Briscool Pre-Insulated Copper Tubes are advanced technological products of high added value and significantly superior in effectiveness compared to conventional insulation methods. Suitable for air conditioning, VRF systems, Split units, refrigeration and industrial systems. Cu-Dhp 99,9% copper pipe insulated with an expanded polyethylene tube, closed cell and an external LDPE foil. Maximum Fire Safety with self-extinguishing DIN 4102-B1, SBI BL S1D0. Nontoxic gases and resistant to external chemical agents and ultra-violet rays. The unique advantages offered by the Briscool Pre-Insulated Copper Tubes, such as copper resistance and durability, coupled with high performance pre-insulation, result in significant energy savings. Briscool Pre-Insulated copper tubes are ideal choice for every modern application with a competitive market price and low installation cost.



## Technical Specs of Copper Tubes

**Chemical Composition**  
%99,9 Cu-Dhp

**Conformity**  
EN-12735-1 , ASTM B280

**Specific Heat (at 20°C)**  
0,0921cal/g°C

**Stretch Modulus(at 20°C annealed)**  
12000kg/mm<sup>2</sup>

**Thermal Conductivity(at 20°C)**  
0.70-0,87 cal/cm<sup>2</sup>

**Elongation A%**  
A% min=45%

**Internal Surface**  
Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

## Technical Specs of PE Insulation

**Material**  
PE (Polyethylene) Foam

**Sustainability**  
Fully recyclable

**Specificities**  
Unique aesthetical appearance  
Excellent mechanical strength

**Density According to  
DIN 53420 ASTM D 1667**  
30-33 KG/m<sup>3</sup>

**Reaction to Fire**  
EN 13501-1 Class B or Class E

**Service Temperatures**  
Minimum - 80°C  
Maximum 95°C

**Thickness Range of Insulation**  
6-9-13-19

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

## Standart Dimensions according to EN 12735-1

Copper Tube External Diameter	Inch	1/4	3/8	1/2	5/8	3/4	7/8
	mm	6.35	9.52	12.70	15.87	19.05	22.22
Copper Tube Wall Thickness	mm	0.80	0.80	0.80	1.00	1.00	1.10
Insulation Thickness	mm	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19
Operation Allowable Pressure	bar	158	98	72	67	59	45
Coil Length	meter	15/50	15/50	15/50	15/50	15/50	15/50



# BRISCOOL DOUBLE WHITE PRE-INSULATED COPPER TUBES

Briscool Pre-Insulated Copper Tubes are advanced technological products of high added value and significantly superior in effectiveness compared to conventional insulation methods. Suitable for air conditioning, VRF systems, Split units, refrigeration and industrial systems. Cu-Dhp 99,9% copper pipe insulated with an expanded polyethylene tube, closed cell and an external LDPE foil. Maximum Fire Safety with self-extinguishing DIN 4102-B1, SBI BL S1D0. Nontoxic gases and resistant to external chemical agents and ultra-violet rays. The unique advantages offered by the Briscool Pre-Insulated Copper Tubes, such as copper resistance and durability, coupled with high performance pre-insulation, result in significant energy savings. Briscool Pre-Insulated copper tubes are ideal choice for every modern application with a competitive market price and low installation cost.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1, ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

## Technical Specs of PE Insulation

### Material

PE (Polyethylene) Foam

### Sustainability

Fully recyclable

### Specificities

Unique aesthetical appearance  
Excellent mechanical strength

**Density According to  
DIN 53420 ASTM D 1667**  
30-33 KG/m<sup>3</sup>

### Reaction to Fire

EN 13501-1 Class B or Class E

### Service Temperatures

Minimum - 80°C  
Maximum 95°C

### Thickness Range of Insulation

6-9-13-19

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.



## Standart Dimensions according to EN 12735-1

Copper Tube External Diameter	Inch	1/4-3/8	1/4-1/2	1/4-5/8	3/8-5/8	3/8-3/4	1/2-3/4
	mm	6,35-9,52	6,35-12,70	6,35-15,87	9,52-15,87	9,52-19,05	12,70-19,05
Copper Tube Wall Thickness	mm	0,80-0,80	0,80-0,80	0,80-1,00	0,80-1,00	0,80-1,00	0,80-1,00
Insulation Thickness	mm	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19
Operation Allowable Pressure	bar	158-98	158-72	158-67	98-67	98-59	72-59
Coil Length	meter	15/50	15/50	15/50	15/50	15/50	15/50



# BRISCOOL BLACK PRE-INSULATED COPPER TUBES

Briscool Pre-Insulated Copper Tubes are advanced technological products of high added value and significantly superior in effectiveness compared to conventional insulation methods. Suitable for air conditioning, VRF systems, Split units, refrigeration and industrial systems. Cu-Dhp 99,9% copper pipe insulated with an expanded polyethylene tube, closed cell and an external LDPE foil. Maximum Fire Safety with self-extinguishing DIN 4102-B1, SBI BL S1D0. Nontoxic gases and resistant to external chemical agents and ultra-violet rays. The unique advantages offered by the Briscool Pre-Insulated Copper Tubes, such as copper resistance and durability, coupled with high performance pre-insulation, result in significant energy savings. Briscool Pre-Insulated copper tubes are ideal choice for every modern application with a competitive market price and low installation cost.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1 , ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

## Technical Specs of PE Insulation

### Metarial

PE (Polyethylene) Foam

### Sustinability

Fully recyclable

### Specifiities

Unique aesthetical apperance  
Excellent mechanical strength

### Density According to DIN 53420 ASTM D 1667

30-33 KG/m<sup>3</sup>

### Reaction to Fire

EN 13501-1 Class B or Class E

### Service Temperatures


Minimum - 80°C  
Maximum 95°C

### Thickness Range of Insulation

6-9-13-19

## Standart Dimensions according to EN 12735-1

Copper Tube External Diameter	Inch	1/4	3/8	1/2	5/8	3/4	7/8
	mm	6.35	9.52	12.70	15.87	19.05	22.22
Copper Tube Wall Thickness	mm	0.80	0.80	0.80	1.00	1.00	1.10
Insulation Thickness	mm	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19
Operation Allowable Pressure	bar	158	98	72	67	59	45
Coil Length	meter	15/50	15/50	15/50	15/50	15/50	15/50

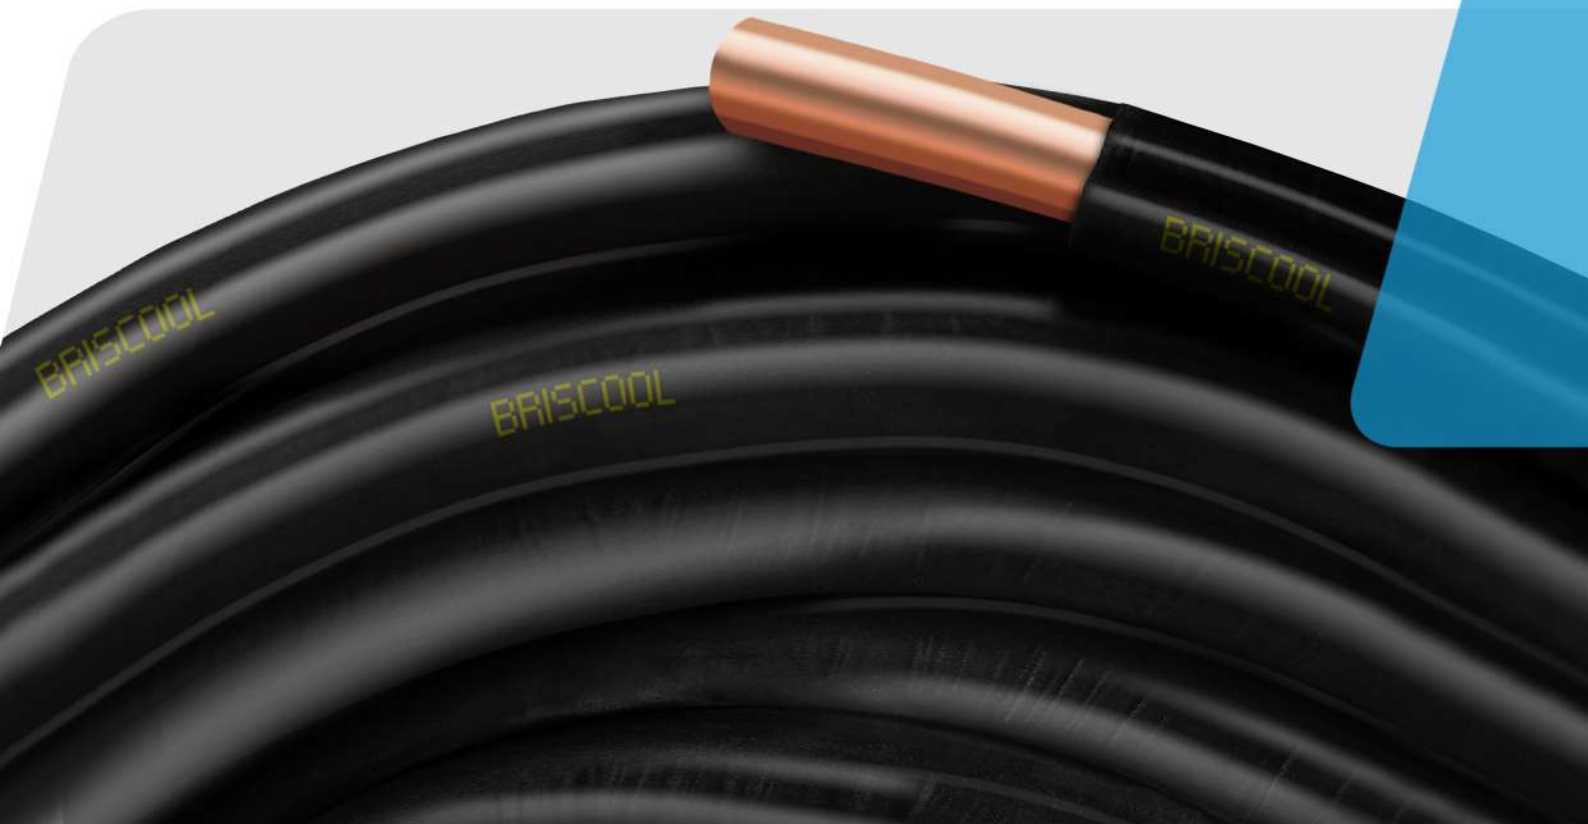

# BRISCOOL DOUBLE BLACK PRE-INSULATED COPPER TUBES

Briscool Pre-Insulated Copper Tubes are advanced technological products of high added value and significantly superior in effectiveness compared to conventional insulation methods. Suitable for air conditioning, VRF systems, Split units, refrigeration and industrial systems. Cu-Dhp 99,9% copper pipe insulated with an expanded polyethylene tube, closed cell and an external LDPE foil. Maximum Fire Safety with self-extinguishing DIN 4102-B1, SBI BL S1D0. Nontoxic gases and resistant to external chemical agents and ultra-violet rays. The unique advantages offered by the Briscool Pre-Insulated Copper Tubes, such as copper resistance and durability, coupled with high performance pre-insulation, result in significant energy savings. Briscool Pre-Insulated copper tubes are ideal choice for every modern application with a competitive market price and low installation cost.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1 , ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

## Technical Specs of PE Insulation

### Material

PE (Polyethylene) Foam

### Sustainability

Fully recyclable

### Specificities

Unique aesthetical appearance  
Excellent mechanical strength

### Density According to DIN 53420 ASTM D 1667

30-33 KG/m<sup>3</sup>

### Reaction to Fire

EN 13501-1 Class B or Class E

### Service Temperatures

Minimum - 80°C

Maximum 95°C

### Thickness Range of Insulation

6-9-13-19

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

## Standart Dimensions according to EN 12735-1

Copper Tube External Diameter	Inch	1/4-3/8	1/4-1/2	1/4-5/8	3/8-5/8	3/8-3/4	1/2-3/4
	mm	6,35-9,52	6,35-12,70	6,35-15,87	9,52-15,87	9,52-19,05	12,70-19,05
Copper Tube Wall Thickness	mm	0,80-0,80	0,80-0,80	0,80-1,00	0,80-1,00	0,80-1,00	0,80-1,00
Insulation Thickness	mm	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19
Operation Allowable Pressure	bar	158-98	158-72	158-67	98-67	98-59	72-59
Coil Length	meter	15/50	15/50	15/50	15/50	15/50	15/50



# BRISCOOL ANTI-UV FIREPROOF PE INSULATION

Briscool Pre-Insulated Copper Tubes are advanced technological products of high added value and significantly superior in effectiveness compared to conventional insulation methods. Suitable for air conditioning, VRF systems, Split units, refrigeration and industrial systems. Cu-Dhp 99,9% copper pipe insulated with an expanded polyethylene tube, closed cell and an external LDPE foil. Closed cell structure for thermal insulation. Maximum Fire Safety with self-extinguishing DIN 4102-B1, SBI BL S1D0. Nontoxic gases and resistant to external chemical agents and ultra-violet rays. Doesn't contain harmful materials to human health. Free of harmful chemicals and HCFC. Not affected by chemicals and environmental conditions. Water and moisture proof. With its flexible structure, it doesn't crush or collapse after impact. The unique advantages offered by the Briscool Pre-Insulated Copper Tubes, such as copper resistance and durability, coupled with high performance pre-insulation, result in significant energy savings. Briscool Pre-Insulated copper tubes are ideal choice for every modern application with a competitive market price and low installation cost.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1, ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

## Technical Specs of PE Insulation

**Dimensional Stabilities According to ISO 2796 for Temperatures up to 100°C**  
< 5%

**Thermal Conductivity Coefficient According to EN ISO 8497**  
0.0357 W/mK (0°C) - 0.0389 W/mK (40°C)

**Working Temperature According to Laboratory Tests**  
-80°C to +110°C

**The Reaction of the Insulation to Fire**  
EN 13501-1 Class B DIN 4102

**Density According to DIN 53420**  
30 - 33 kg/m<sup>3</sup>

**Resistance to Chemical Agents According to ASTM 543-56 T**  
Very Good

**Vapour water diffusion resistance coefficient according to EN 13469**  
12,500

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

## Standart Dimensions according to EN 12735-1

Copper Tube External Diameter	Inch	1/4	3/8	1/2	5/8	3/4	7/8
	mm	6.35	9.52	12.70	15.87	19.05	22.22
Copper Tube Wall Thickness	mm	0.80	0.80	0.80	1.00	1.00	1.10
Insulation Thickness	mm	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19
Operation Allowable Pressure	bar	158	98	72	67	59	45
Coil Length	meter	15/50	15/50	15/50	15/50	15/50	15/50



Cross-Linked  
Polyethylene



RESISTANCE



# BRISCOOL RUBBER PRE-INSULATED COPPER TUBES

Briscool Rubber Insulated Copper Pipes are advanced technological products with high added value and significantly superior in effectiveness compared to traditional insulation methods. It is suitable for air conditioners, VRF systems, Split units. It provides maximum savings with its low thermal conductivity coefficient (0.034W/mK). Maximum Fire Safety with EN 13501-1 B-s2 d0. Does not release toxic gases and fumes during fire. Rubber Insulated Copper Pipe is also suitable for food industry, subway and submarines. It is environmentally friendly, does not contain HCFC-GFC. The unique advantages of Briscool Rubber Insulated Copper Tubes, such as copper resistance and durability, combined with high performance pre-insulation provide significant energy savings. Briscool Rubber Insulated Copper Tubing is the ideal choice for any modern application with a competitive market price and low installation cost.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1 , ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1  
legislation

## Technical Specs of Rubber Insulation

### Material

Elastomeric rubber foam

### Types of Facing

Without Facing

### μ (Water Vapor Diffusion Resistance Factor)

7000

### λ (Thermal Conductivity) W/ (m.K)

0.0034(0°C)

0.0039(25°C)

0.0041(75°C)

### Fire Response Classification (EN 13501-1)

BL-s2,d0

### Service Temperature °C (EN14707)

-50/116°C

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.



## Standart Dimensions according to EN 12735-1

Copper Tube External Diameter	Inch	1/4	3/8	1/2	5/8	3/4	7/8
	mm	6.35	9.52	12.70	15.87	19.05	22.22
Copper Tube Wall Thickness	mm	0.80	0.80	0.80	1.00	1.00	1.10
Insulation Thickness	mm	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19
Operation Allowable Pressure	bar	158	98	72	67	59	45
Coil Length	meter	15/50	15/50	15/50	15/50	15/50	15/50



# BRISCOOL PRE-INSULATED COPPER TUBES PRODUCT CATEGORIES

Briscool Pre-Insulated Copper Tubes are advanced technological products of high added value and significantly superior in effectiveness compared to conventional insulation methods. Suitable for air conditioning, VRF systems, Split units, refrigeration and industrial systems. Cu-Dhp 99,9% copper pipe insulated with an expanded polyethylene tube, closed cell and an external LDPE foil. Maximum Fire Safety with self-extinguishing DIN 4102-B1, SBI BL S1D0. Nontoxic gases and resistant to external chemical agents and ultra-violet rays. The unique advantages offered by the Briscool Pre-Insulated Copper Tubes, such as copper resistance and durability, coupled with high performance pre-insulation, result in significant energy savings. Briscool Pre-Insulated copper tubes are ideal choice for every modern application with a competitive market price and low installation cost.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1 , ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

## Technical Specs of PE Insulation

### Material

PE (Polyethylene) Foam

### Sustainability

Fully recyclable

### Specificities

Unique aesthetical appearance  
Excellent mechanical strength

### Density According to DIN 53420 ASTM D 1667

30-33 KG/m<sup>3</sup>

### Reaction to Fire

EN 13501-1 Class B or Class E

### Service Temperatures

Minimum - 80°C  
Maximum 95°C

### Thickness Range of Insulation


6-9-13-19

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

## Standart Dimensions according to EN 12735-1

The dimensions listed in the table are subject to variation due to the tolerance features of the pipes.

Copper Tube External Diameter	Inch	1/4	3/8	1/2	5/8	3/4	7/8
	mm	6.35	9.52	12.70	15.87	19.05	22.22
BRISCOOL SMART	mm	1.00	1.00	1.00	1.00	1.00	1.12
BRISCOOL MAXI	mm	0.80	0.80	0.80	1.00	1.00	1.12
B-FORM VRV	mm	0.75	0.75	0.75	0.90	0.90	
B-FORM SPLIT	mm	0.70	0.70	0.70	0.80	0.80	

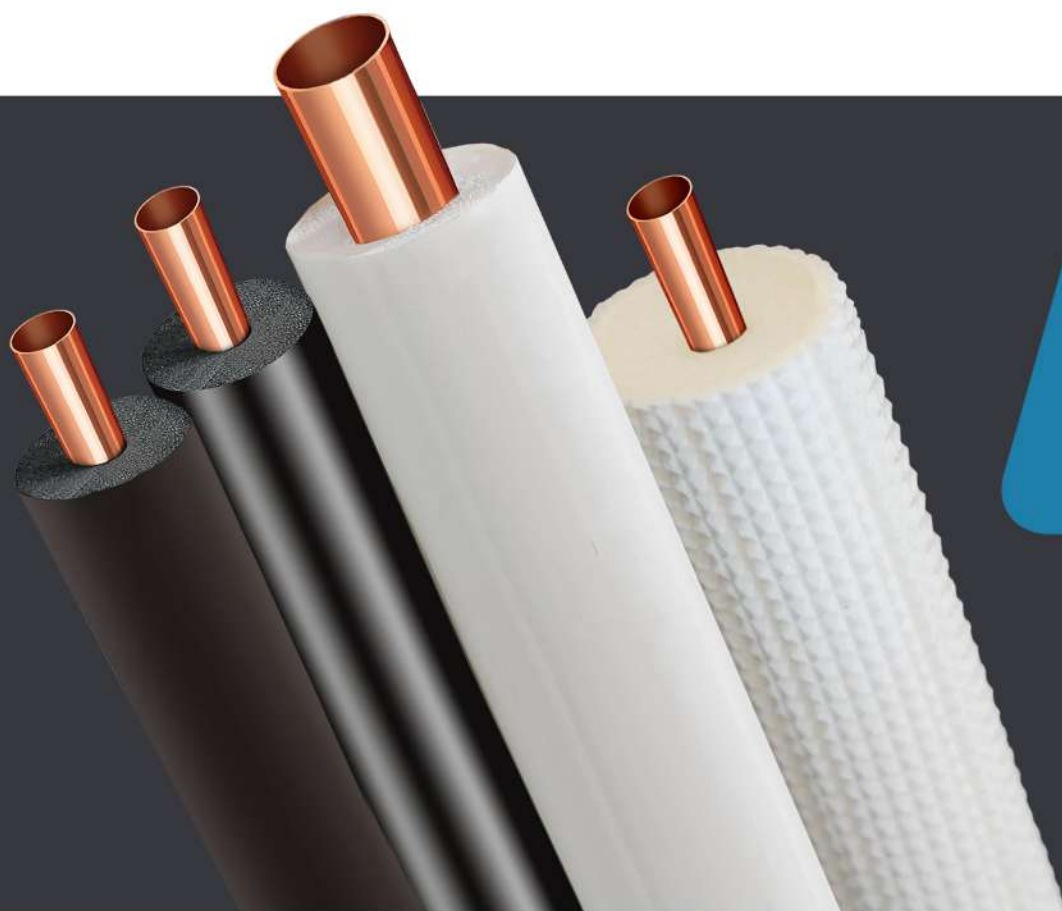

# TRANSPORTATION

## HOW MANY ROLLS FITS TO PALLETS

### White Pre Insulated Copper Tube

- 1/4 = 15
- 3/8 = 15
- 1/2 = 15
- 5/8 = 10
- 3/4 = 10

### Black Pre Insulated Copper Tube

- 1/4 = 15
- 3/8 = 15
- 1/2 = 15
- 5/8 = 10
- 3/4 = 10

### 9 MM Rubber Insulated Copper Pipe

- 1/4 = 8
- 3/8 = 8
- 1/2 = 7
- 5/8 = 6
- 3/4 = 6

### White Double Insulated Copper Tube

- 1/4" - 3/8 = 8
- 1/4" - 1/2 = 8
- 1/4" - 5/8 = 7
- 3/8" - 5/8 = 7
- 3/8" - 3/4 = 6
- 1/2" - 3/4 = 6

### Black Double Insulated Copper Tube

- 1/4" - 3/8 = 8
- 1/4" - 1/2 = 8
- 1/4" - 5/8 = 7
- 3/8" - 5/8 = 7
- 3/8" - 3/4 = 6
- 1/2" - 3/4 = 6

### 13 MM Rubber Insulated Copper Pipe

- 1/4 = 8
- 3/8 = 8
- 1/2 = 7
- 5/8 = 6
- 3/4 = 6

### TRANSPORTATION

PALLET SIZE : 75 \* 75


- 20' DRY CONTAINER
- 40' DRY CONTAINER
- 40' HIGH CUBE
- 45' HIGH CUBE
- STANDARD OPTIMA TRUCK
- MEGA TRUCK WITH AWNING

24 PALLET  
48 PALLET  
48 PALLET  
54 PALLET  
54 PALLET  
54 PALLET


### Anti-UV White Pre Insulated Copper Tube

- 1/4 = 15
- 3/8 = 15
- 1/2 = 15
- 5/8 = 10
- 3/4 = 10

20'DC Container 24 Pallet  
40'HC Container 48 Pallet  
TRUCK 54 Pallet

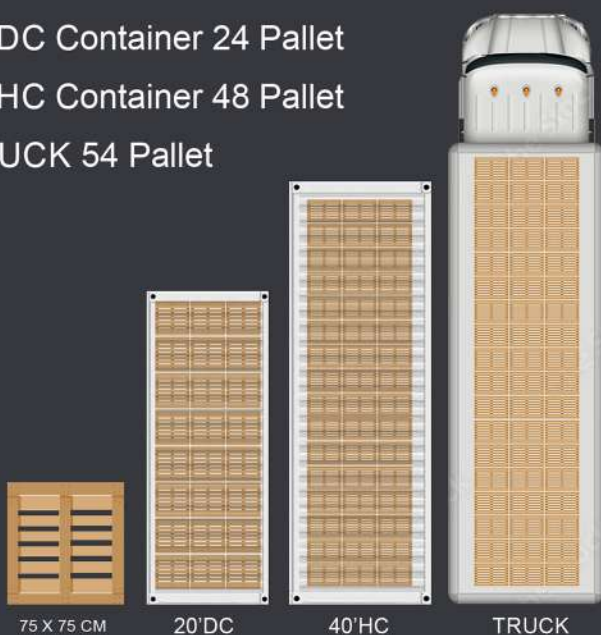

# BRISCOOL COPPER MONTAGE KITS

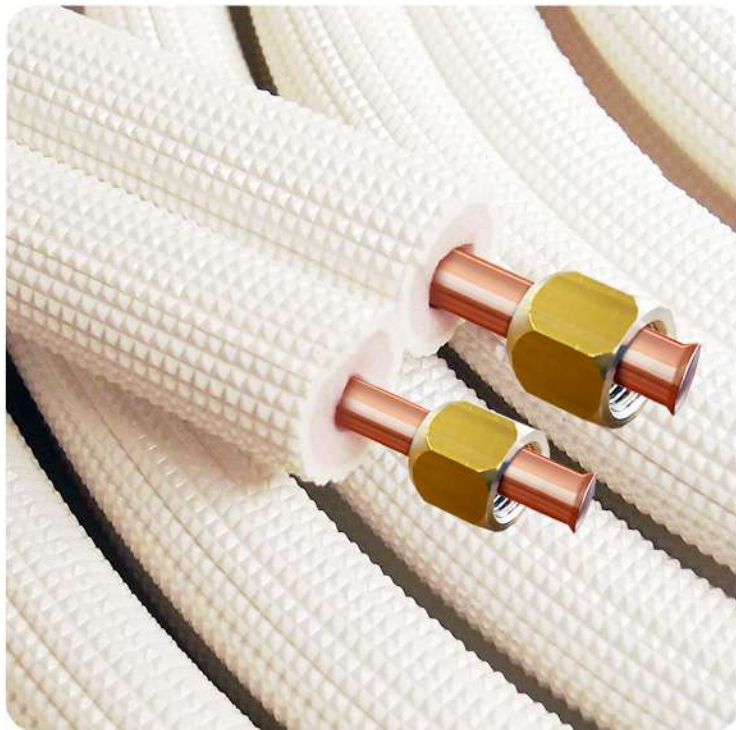

# BRISCOOL COPPER MONTAGE KITS

Briscool Copper Montage Kits are designed especially for the Split Air Conditioning and Heat Pump Systems products requiring installation with flared connections. Cu-Dhp 99,9% copper pipe insulated with an expanded polyethylene tube, closed cell and an external LDPE foil. Maximum Fire Safety with self-extinguishing DIN 4102-B1, SBI BL S1D0. Non Toxic gases and resistant to external chemical agents and ultra-violet rays. The unique advantages offered by the Briscool Montage Kits, including copper resistance and pre-flared ends with mounted flare nuts, result in significant energy saving and in quick, cost effective field installations.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1 , ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

## Technical Specs of PE Insulation

### Material

PE (Polyethylene) Foam

### Sustainability

Fully recyclable

### Specificities

Unique aesthetical appearance  
Excellent mechanical strength

### Density According to DIN 53420

ASTM D 1667

30-33 KG/m<sup>3</sup>

### Reaction to Fire

EN 13501-1 Class B or Class E

### Service Temperatures

Minimum - 80°C

Maximum 95°C


### Thickness Range of Insulation

6-9-13-19

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

## Standart Dimensions according to EN 12735-1

Copper Tube External Diameter	Inch	1/4-3/8	1/4-1/2	1/4-5/8	3/8-5/8	3/8-3/4	1/2-3/4
	mm	6,35-9,52	6,35-12,70	6,35-15,87	9,52-15,87	9,52-19,05	12,70-19,05
Copper Tube Wall Thickness	mm	0,80-0,80	0,80-0,80	0,80-1,00	0,80-1,00	0,80-1,00	0,80-1,00
Insulation Thickness	mm	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19	6-9-13-19
Operation Allowable Pressure	bar	158-98	158-72	158-67	98-67	98-59	72-59
Coil Length	meter	3-5-7-10-15	3-5-7-10-15	3-5-7-10-15	3-5-7-10-15	3-5-7-10-15	3-5-7-10-15

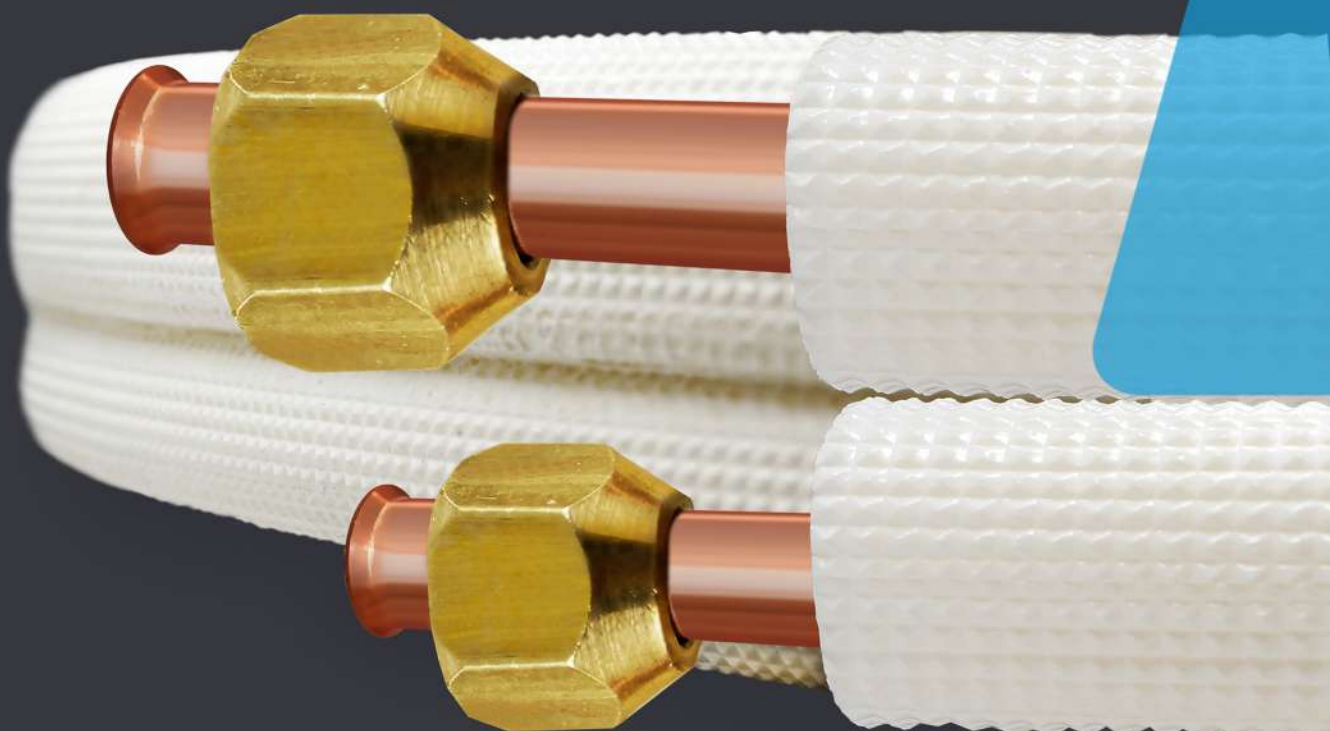


## Advantages of Briscool Montage Kits:

- Quick, Safe and Cost effective installations
- High UV Protection
- Comprehensive range of sizes.
- Custom production for you (OEM)
- Optional Premium Content



### Additional Products:

AC Bracket  
Drain Hose  
Electric Cable  
Signal Cable  
Screw  
Sponge  
Clamp  
Tape  
Socket  
and more products ...

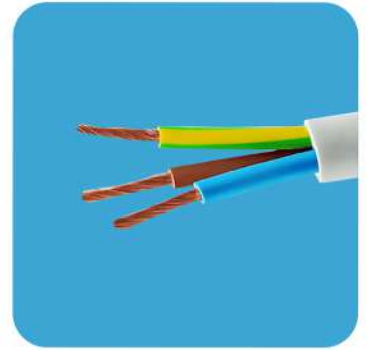



# BRISCOOL COPPER TUBES

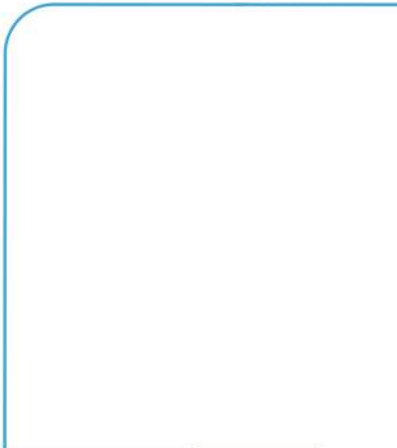

# BRISCOOL STRAIGHT COPPER TUBES

Briscool copper tubes are easy to install with cost-effectiveness and provide safe and secure operation. The straight copper tubes are used for air conditioning & refrigeration industries, electrical industries and sanitary purposes. Cu-Dhp 99,9% copper pipe (EN 12735-1) sealed ends and dehumidified, R290 nonannealed and R220 annealed in straight form, high resistance to pitting corrosion. Briscool copper tubes are resistant to high operation pressures and temperatures. They are stable and self-supporting.



## Technical Specs of Copper Tubes

### Chemical Composition

%99,9 Cu-Dhp

### Conformity

EN-12735-1 , ASTM B280

### Specific Heat (at 20°C)

0,0921cal/g°C

### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

### Elongation A%

A% min=45%

### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

## Straight Copper Tubes :

Ease of cold bending

Reduction of necessary fittings

Easier construction of networks

Faster installation and higher workmanship

Overall lower installation costs

Durable pipes, their resistance to gas pressure is high.

Doesn't pollute the water, they have a self-cleaning feature of bacteria.

Saves on shipping cost as it is lightweight and easy portable

Human and environment friendly.

Fire resistant.

Standart Dimensions according to EN 12735-1

## Hard Straight Copper Tubes

Diameter x Thickness (mm)	Internal Diameter (mm)	Nominal Copper Weight (kg/m)	External Surface Area (m <sup>2</sup> /m)	Tube Lengths	Maximum Allowable Pressure (bar)
15 x 0,80	13,4	0,318	0,047	5m	67
15 x 1,00	13,04	0,391	0,047	5m	82
16 x 1,00	14,0	0,419	0,050	5m	77
18 x 0,80	16,4	0,385	0,057	5m	56
18 x 1,00	16,0	0,475	0,057	5m	66
22 x 1,00	20,0	0,587	0,69	5m	54
22 x 1,20	19,06	0,709	0,69	5m	59
28 x 1,00	26,0	0,755	0,088	5m	42
28 x 1,20	25,6	0,913	0,088	5m	51
28 x 1,50	25,0	1,111	0,088	5m	64
35 x 1,00	33,0	0,950	0,110	5m	33
35 x 1,20	32,6	1,152	0,110	5m	41
35 x 1,50	32,0	1,405	0,110	5m	50
42 x 1,00	40,0	1,146	0,132	5m	28
42 x 1,20	39,6	1,368	0,132	5m	33
42 x 1,50	39,00	1,700	0,132	5m	42
54 x 1,20	51,6	1,771	0,170	5m	26
54 x 1,50	51,0	2,202	0,170	5m	32

\*The values of the maximum allowable pressure refer to the material condition r200 a safety factor of 3.0 used. The minus tolerance of the wall thickness is considered. No further processing is taken into account. For temperature up to 100°C



# BRISCOOL

## MEDICAL COPPER TUBES

In the sensitive healthcare areas and installations, it is imperative to use materials that safeguard cleanliness and have a neat appearance and durability. The Medical Copper Tube (Cu-Dhp 99,9%) is suitable for medical gas system, gas mixture, air system and vacuum systems as well as anesthetic evacuation gases in accordance with the corresponding standards. Medical Copper Tube is subjected to a rigorous internal cleaning process according to the technical specifications provided by the EN 13348.



### Technical Specs of Copper Tubes

**Chemical Composition**  
%99,9 Cu-Dhp

**Conformity**  
EN-12735-1 , ASTM B280

**Specific Heat (at 20°C)**  
0,0921cal/g°C

**Stretch Modulus(at 20°C annealed)**  
12000kg/mm<sup>2</sup>

**Thermal Conductivity(at 20°C)**  
0.70-0,87 cal/cm<sup>2</sup>

**Elongation A%**  
A% min=45%

**Internal Surface**  
Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

### Standarts of Medical Tubes

Manufactured according to EN 1057, EN13348 and TSE 380.

Seamless, semi-hard annealed and straight pipe

Electrolytic and Arsenic-free copper

The inside of the copper pipes were cleaned with Carbon Tetrachloride.

The relevant standard, the manufacturer's company name and the suitability for oxygen use are permanently written on the pipes.


The two ends of the pipes are closed with plastic plugs.

Standart Dimensions according to EN 12735-1

## Hard Straight Copper Tubes

Diameter x Thickness (mm)	Internal Diameter (mm)	Nominal Copper Weight (kg/m)	External Surface Area (m <sup>2</sup> /m)	Tube Lengths	Maximum Allowable Pressure (bar)
6 x 1,00	4,0	0,140	0,019	5m	225
8 x 1,00	6,0	0,196	0,025	5m	163
10 x 1,00	8,0	0,252	0,031	5m	127
12 x 1,00	10,0	0,308	0,038	5m	104
15 x 1,00	13,04	0,391	0,047	5m	82
18 x 1,00	16,0	0,475	0,057	5m	66
22 x 1,00	20,0	0,587	0,069	5m	54
28 x 1,00	26,0	0,755	0,088	5m	42
35 x 1,00	33,0	0,950	0,110	5m	33
35 x 1,50	32,0	1,405	0,110	5m	50
42 x 1,00	40,0	1,146	0,132	5m	28
42 x 1,50	39,00	1,700	0,132	5m	42
54 x 1,50	51,0	2,202	0,170	5m	32
54 x 2,00	50,0	2,908	0,170	5m	43

\*The values of the maximum allowable pressure refer to the material condition r200 a safety factor of 3.0 used. The minus tolerance of the wall thickness is considered. No further processing is taken into account. For temperature up to 100°C

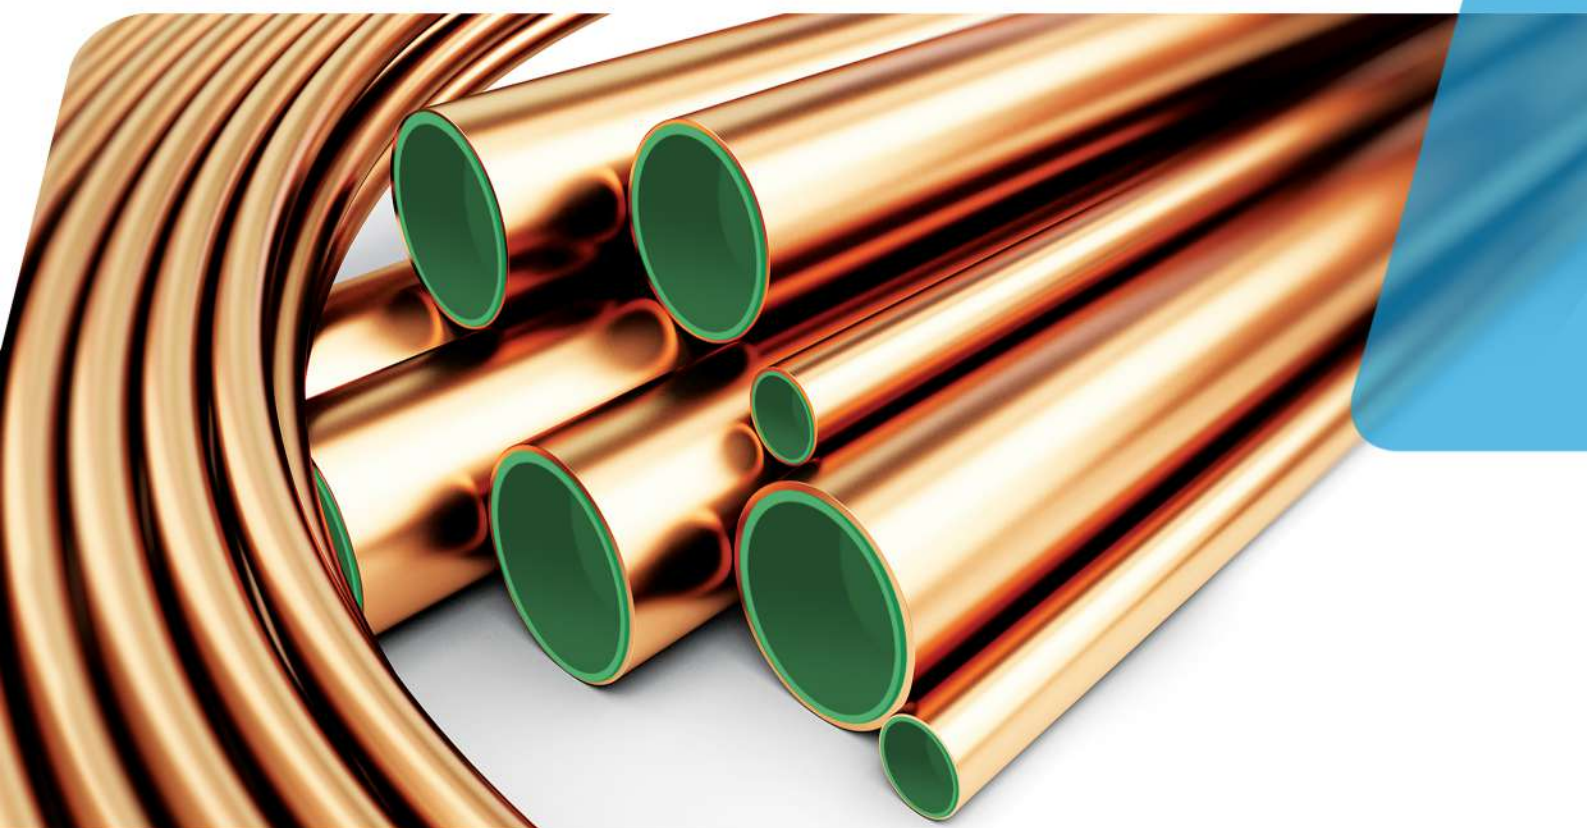

# BRISCOOL

## LWC LEVEL WOUND COILS

The LWC Copper Tube (Cu-Dhp 99,9%) is mostly applied to air conditioning, refrigeration and general engineering applications. LWC Copper Tube is produced according to the EN 12735-1 standard and it also complies with the ASTM B280 specifications. Level Wound Coils are specially suited to long production runs for industrial applications and it is widely applied to the Air Conditioning & Refrigeration as well as the Heat Exchanger field. Due to the large coil shape of the LWC, it allows the user to obtain pipes of different lengths. For proper delivery of coil rolls are stacked on a wooden pallet and enclosed in stretch wrap. In this way, dust and damage to the pipes are prevented.



### Technical Specs of Copper Tubes

#### Chemical Composition

%99,9 Cu-Dhp

#### Conformity

EN-12735-1 , ASTM B280

#### Specific Heat (at 20°C)

0,0921cal/g°C

#### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

#### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

#### Elongation A%

A% min=45%

#### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

### Technical Properties of LWC

#### Material

99.9% Cu and P = 0.015 - 0.040%

#### Temper

Light Annealed (050)

Soft Annealed (060)

also can be produced as  
hard drawn temper

#### Standards

ASTM B280

EN 12735-1


Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

Standart Dimensions according to EN 12735-1

## LWC Copper Tubes

Outer Diameter (mm)		Wall thickness (mm)		Nominal copper wight (kg/m)		Coil Weight (kg)	
inch	mm	Min.	Max.	Min.	Max	Min.	Max
3/16	4,76	0,35	0,76	0,045	0,086	90	300
1/4	6,35	0,35	1,00	0,060	0,152	90	300
5/16	7,94	0,35	1,00	0,075	0,031	90	300
3/8	9,35	0,35	1,00	0,090	0,237	90	300
-	10	0,35	1,00	0,096	0,256	90	300
-	12	0,35	1,00	0,116	0,313	90	300
1/2	12,70	0,35	1,00	0,123	0,333	90	300
-	15	0,40	1,00	0,166	0,398	90	300
5/8	15,88	0,40	1,00	0,176	0,423	90	300
-	16	0,50	1,00	0,220	0,450	90	300
-	18	0,60	1,00	0,297	0,483	90	300
3/4	19,05	0,60	1,00	0,315	0,513	90	300

\*The values of the maximum allowable pressure refer to the material condition r200 a safety factor of 3.0 used. The minus tolerance of the wall thickness is considered. No further processing is taken into account. For temperature up to 100°C

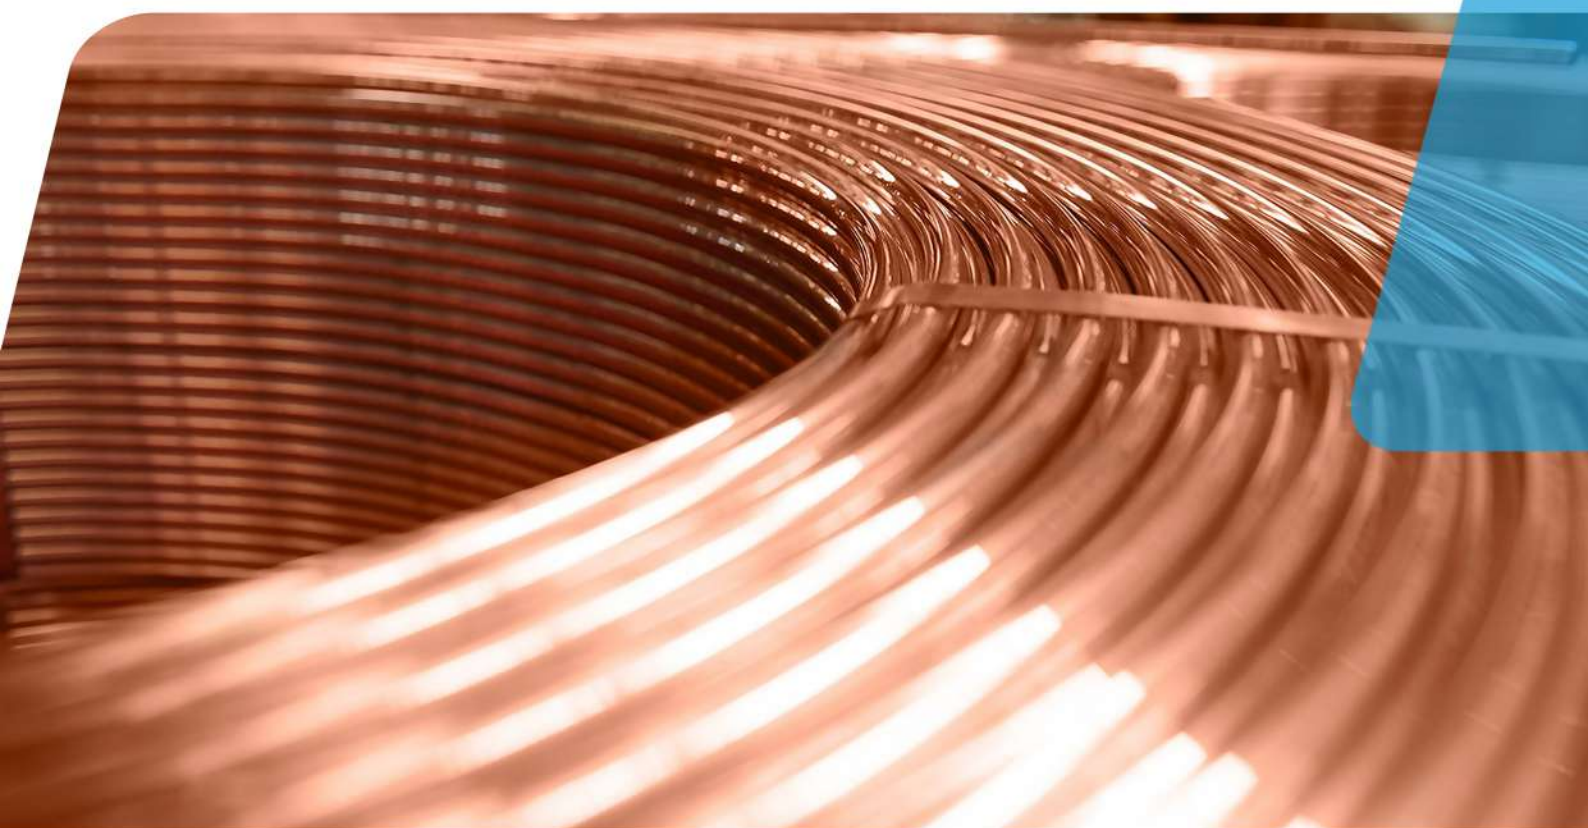

# BRISCOOL

## PANCAKE COPPER TUBES

The Pancake Copper Tube (Cu-Dhp 99,9% copper pipe (EN 12735-1) end- capped, R220 annealed in coil form, high resistance to pitting corrosion) is mainly applied to air conditioning and refrigeration industry and installation. According the EN standard the Pancake Tube has good bending properties for usage in utility supplies such as plumbing installations, gas transport networks, air conditioning systems and refrigerant piping. These products are supplied in the annealed form. All coils are cleaned and capped to keep contaminants from entering the tube. Then they are individually labeled, shrink wrapped and boxed in cardboard cartons for ease of handling and distribution.



### Technical Specs of Copper Tubes

#### Chemical Composition

%99,9 Cu-Dhp

#### Conformity

EN-12735-1 , ASTM B280

#### Specific Heat (at 20°C)

0,0921cal/g°C

#### Standards

ASTM B280  
EN 12735-1

#### Stretch Modulus(at 20°C annealed)

12000kg/mm<sup>2</sup>

#### Thermal Conductivity(at 20°C)

0.70-0,87 cal/cm<sup>2</sup>

#### Elongation A%

A% min=45%

#### Internal Surface

Glossy, perfectly clean conforming  
ASTM B-280 and EN12735-1 legislation

### Technical Properties of Pancake Tubes

#### Material

99.9% Cu and P = 0.015 - 0.040%

#### Temper

Light Annealed (050)

Soft Annealed (060)

also can be produced as  
hard drawn temper

#### Standards

ASTM B280

EN 12735-1

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.



Standart Dimensions according to EN 12735-1

## Pancake Tube Product Range

Outer Diameter (mm)		Wall Thickness (mm)	Nominal Copper Weight (kg/m)	Coil Length (m)
inch	mm			
1/4	6,35	0,70	0,113	15-50
1/4	6,35	0,80	0,126	15-50
5/16	7,94	0,70	0,144	15-50
3/8	9,35	0,70	0,172	15-50
3/8	9,35	0,80	0,195	15-50
1/2	12,70	0,70	0,239	15-50
1/2	12,70	0,80	0,271	15-50
5/8	15,88	0,80	0,343	15-50
5/8	15,88	1,00	0,423	15-50
3/4	19,05	0,80	0,415	15-50
3/4	19,05	1,00	0,513	15-50



# BRISCOOL COPPER FITTINGS

## ELBOW-P TRAP-COUPPLING-TEE

### 1 COPPER ELBOW

- COPPER ELBOW (06 MM) 1/4
- COPPER ELBOW (08 MM) 5/16
- COPPER ELBOW (10 MM) 3/8
- COPPER ELBOW (12 MM) 1/2
- COPPER ELBOW (16 MM) 5/8
- COPPER ELBOW (18-19 MM) 3/4
- COPPER ELBOW (22 MM) 7/8
- COPPER ELBOW (25 MM) 1
- COPPER ELBOW (28 MM) 1-1/8
- COPPER ELBOW (35 MM) 1-3/8
- COPPER ELBOW (42 MM) 1-5/8
- COPPER ELBOW (54 MM) 2-1/8
- COPPER ELBOW (22 MM) 7/8 (LONG)
- COPPER ELBOW (28 MM) 1-1/8 (LONG)
- COPPER ELBOW 45 DEGREES (22 MM) 7/8
- COPPER ELBOW 45 DEGREES (28 MM) 1-1/8
- COPPER ELBOW 45 DEGREES (35 MM) 1-3/8
- COPPER ELBOW 45 DEGREES (42 MM) 1-5/8



### 2 COPPER P TRAP

- COPPER P-TRAP (16 MM) 5/8
- COPPER P-TRAP (18-19 MM) 3/4
- COPPER P-TRAP (22 MM) 7/8
- COPPER P-TRAP (28 MM) 1-1/8
- COPPER P-TRAP (35 MM) 1-3/8
- COPPER P-TRAP (42 MM) 1-5/8



### 3

## COPPER COUPLING

- COPPER COUPLING (06 MM) 1/4
- COPPER COUPLING (10 MM) 3/8
- COPPER COUPLING (12 MM) 1/2
- COPPER COUPLING (16 MM) 5/8
- COPPER COUPLING (18-19 MM) 3/4
- COPPER COUPLING (22 MM) 7/8
- COPPER COUPLING (25 MM) 1
- COPPER COUPLING (28 MM) 1-1/8
- COPPER COUPLING (35 MM) 1-3/8
- COPPER COUPLING (42 MM) 1-5/8
- COPPER COUPLING (54 MM) 2-1/8

### 4

## COPPER T

- COPPER T (06 MM) 1/4
- COPPER T (10 MM) 3/8
- COPPER T (12 MM) 1/2
- COPPER T (16 MM) 5/8
- COPPER T (18-19 MM) 3/4
- COPPER T (22 MM) 7/8
- COPPER T (28 MM) 1-1/8
- COPPER T (35 MM) 1-3/8
- COPPER T (42 MM) 1-5/8
- COPPER T (54 MM) 2-1/8



# BRISCOOL TUBE FORMING

Briscool has been serving this sector since 1986. This know how has led Briscool to manufacture tube started tube forming manufacturing with fully automatic machines manufactured by its own technology.



This engineering skill is reflected to its customers as a competitive service. Briscool, which has a very advanced machine park today, produces pipe forming in a wide range of pipe types and sizes. Pipe forming is a matter of specialization in our company. Our factory in Niğde serves Pipe Forming requests.



Briscool shapes Copper, Aluminum and Stainless Steel Tubes in a wide range diameter range from 2 mm to 32 mm, blows out and welds the elements necessary for use with cold soldering welding or induction machines. In accordance with the requirement, these pipes are subjected to 100% gauge control and flow and leak test.




# BRISCOOL TUBE FORMING

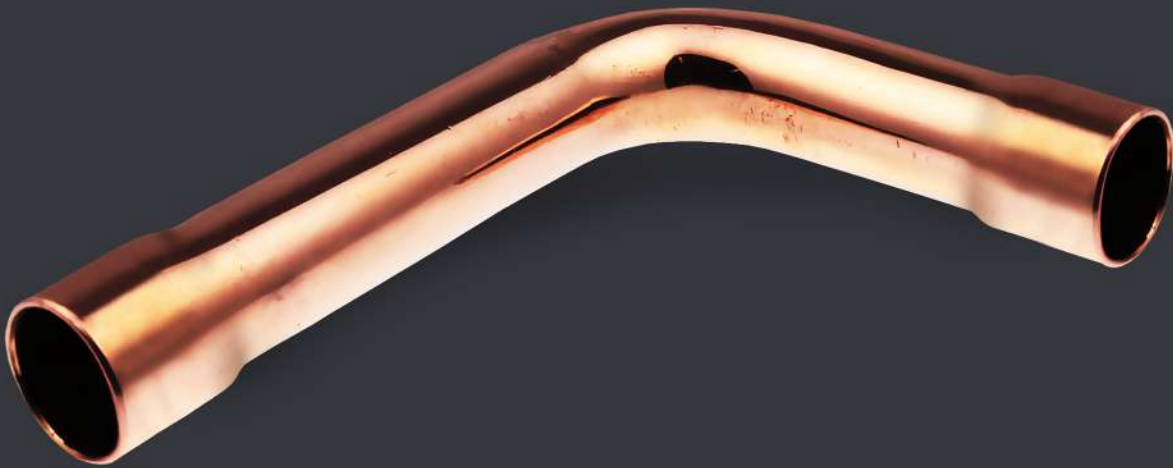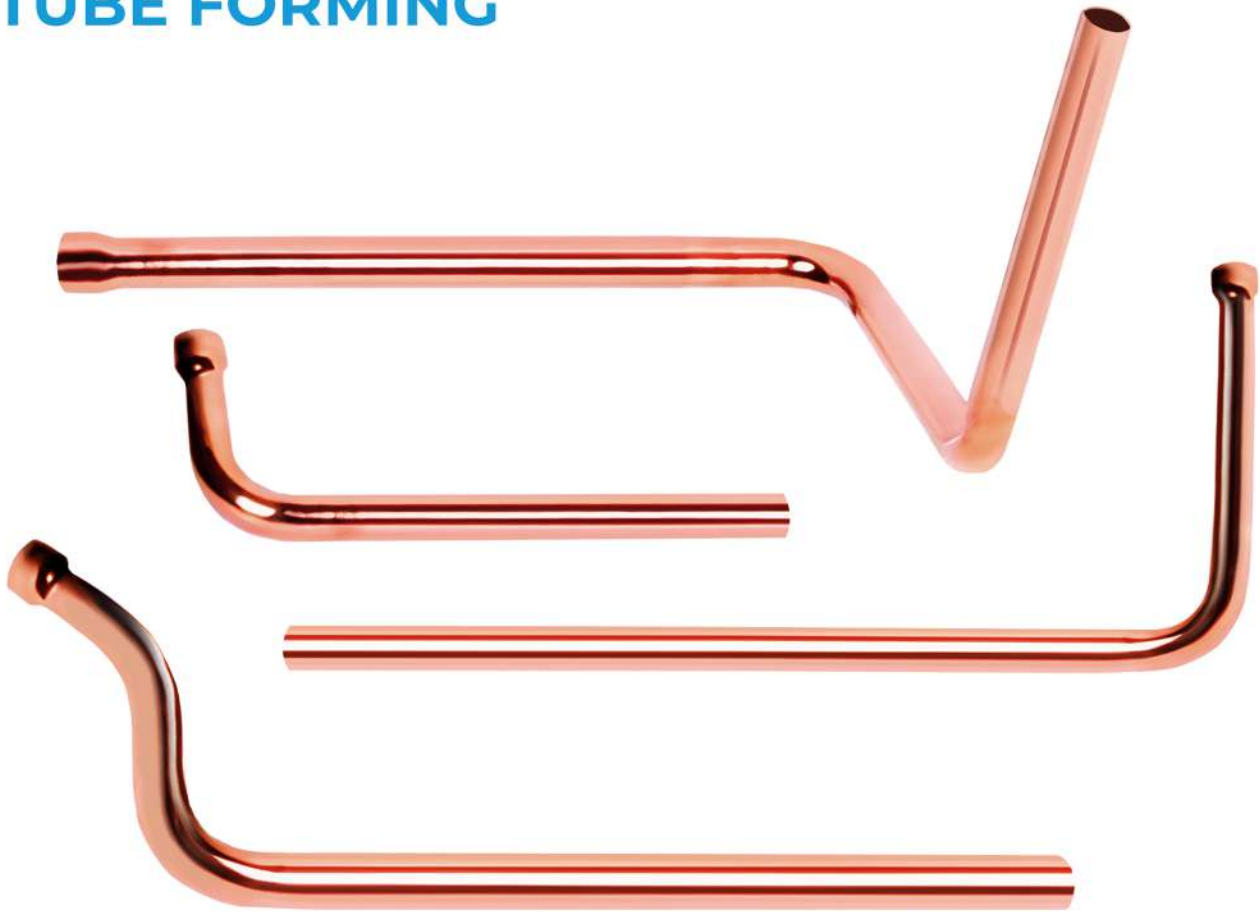

# BRISCOOL BRANCH PIPES

Joints have become very common with VRF air conditioning systems. Joints are needed when more than one place needs to be cooled or heated at the same time. The main purpose is to separate or combine the refrigerant. Joints are used in copper pipe installations when separating the refrigerant coming from a single line into two lines or reducing the fluid coming from two lines into a single line. Briscool joints conforms to TS EN 1254-1 standards

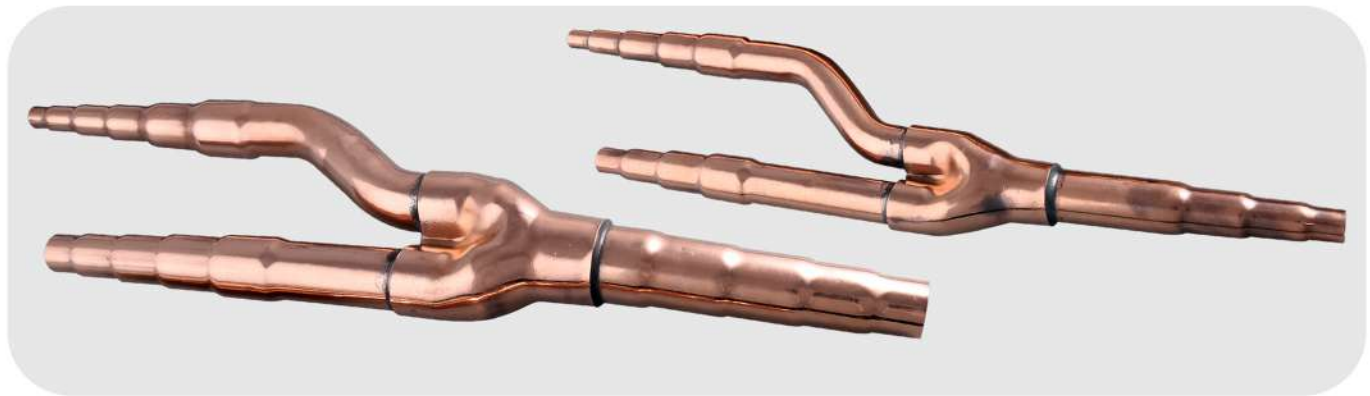

## Technical Properties of Branch Pipe

Model	mm/inch	A			B				C			
DIS-22-1	mm	12.7 / 15.9 / 19.1			19.1/12.7/9.6				19.1 / 12.7 / 9.6			
	inch	1/2	5/8	3/4	3/4	1/2	3/8	3/4	1/2	3/8		
DIS-180-1	mm	15.9/19.1/22.2			19.1/15.9/12.7/19.6				19.1 / 15.9 / 12.7 / 9.6			
	inch	5/8	3/4	7/8	3/4	5/8	1/2	3/8	3/4	5/8	1/2	3/8
DIS-371-1	mm	25.4/28.6/31.8			25.4/22.2/19.1				25.4 / 22.2 / 19.1			
	inch	1	1 - 1/8	1 - 1/4	1	7/8	3/4	1	7/8	3/4		
DIS-540-1	mm	28.6 / 31.8 / 38.1			31.8/28.6/25.4/19.1				31.8 / 28.6 / 25.4 / 19.1			
	inch	1 - 1/8	1 - 1/4	1 - 1/2	1 - 1/4	1 - 1/8	1	3/4	1 - 1/4	1 - 1/8	1	3/4

Values are listed, as obtained under standart laboraty conditions and may be amended, without prior notice.

# BRISCOOL CLIMA BRACKETS


Air conditioner brackets are metal frames needed to enable wall or window mounting of air conditioning units. These brackets are very important for bearing the weight of air conditioning units. Together with the brackets, air conditioning units do not take up extra space in workplaces and homes and save you from the noise that will occur. In addition, the units placed outside provide better air circulation. Briscool air conditioner brackets are made of strong metals such as stainless steel and are built to withstand the weight of the air conditioner. These brackets are available in screwed or welded versions.

Size	Type	Thickness
400 * 400	Welded	2.0 MM
400 * 400	Screwed	2.0 MM
500 * 500	Welded	2.0 MM
500 * 500	Screwed	2.0 MM
600 * 600	Welded	2.0 MM



# BRISCOOL DRAIN HOSES


Air conditioners cool the air in rooms and spaces with refrigerant gases. Condensation occurs due to the collision of hot and cold air with the gas circulating in the copper pipe network. The moisture and water formed as a result of these condensations must be successfully removed from the air conditioner. Otherwise, this water will be trapped in the air conditioning system and damage the system. Drainage hoses also respond to this need. Thanks to the drainage hoses, the water formed is safely discharged. In high-rise buildings and offices, drainage hose installation is important for the correct discharge of water. Otherwise, the accumulated water will accumulate moisture in the installation system and air conditioner and cause rot. Briscool drain hoses conform to TS 9128 and DIN 1187 standards and are manufactured in accordance with EU building materials regulation (305/2011/EU).

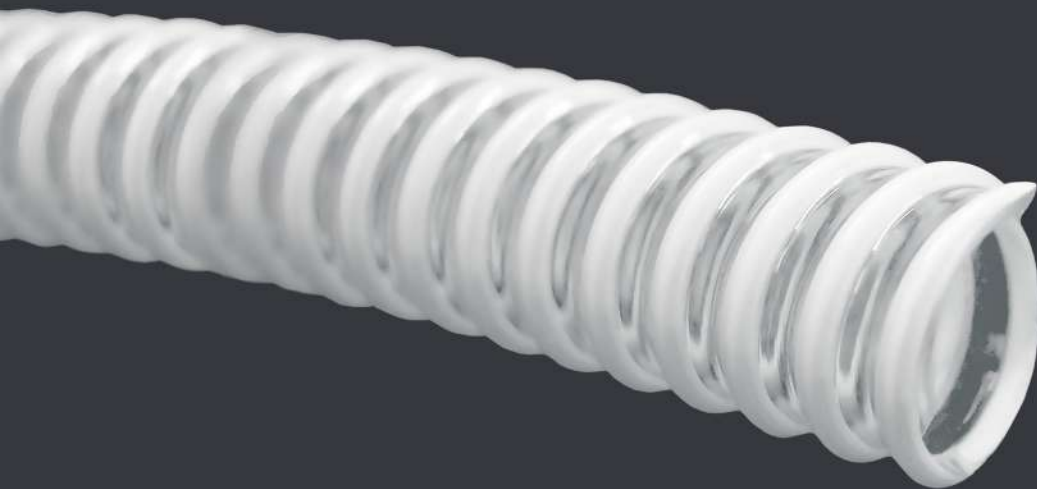



# BİR KABLO



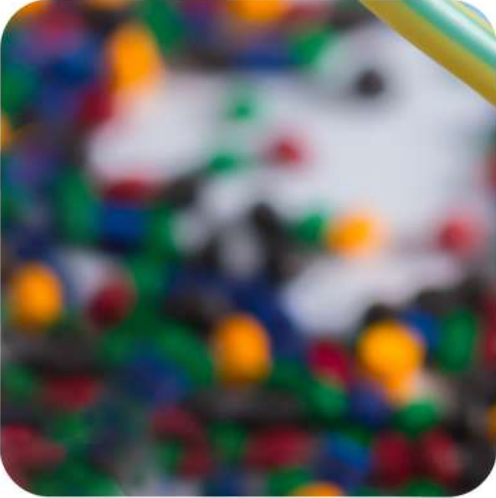

# DİRENÇ KABLO



BIRKABLO always aims at competitive prices and best quality at home and abroad. With its 15 branches in Turkey, more than 300 employees and dynamic and experienced staff, it aims to provide the best service to our valued customers as soon as possible. With its strong export infrastructure and experience, it provides your needs in the best way.

# BİRKABLO

## H05VV-F ELECTRIC CABLES (TTR)

Number of Cores	Core Colors
2	
3	
4	
5	

1-Fine-stranded Cu-conductor

2-(PVC) insulation

3-(PVC) outer sheath

### Insulated Harmonized Wires

#### Construction

Multicore flexible cables with fine stranded copper conductors, (PVC) insulation and (PVC) sheath.


#### Technical Data

These cables are produced according to above standards.

- Permissible operating temperature: 70 °C
- Color of outer sheath: White and black

#### Applications

Used in covered and dry places where the mechanical stresses exist, on household appliances, in damp and steamed areas.

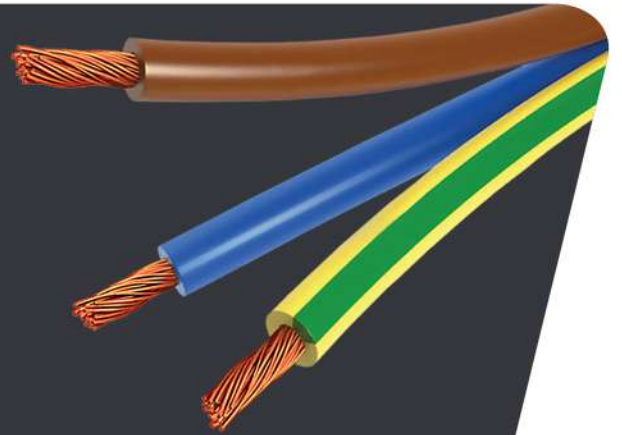

Rated Cross-section	Cu Factor	Overall Diameter of Cable (Approx.)	Net Weight (Approx.)	Conductor DC Resistance at 20 °C	Current Carrying Capacity	Delivery Length (Approx.)
<i>mm<sup>2</sup></i>	<i>1000 m</i>	<i>mm</i>	<i>kg/km</i>	<i>Ω/km</i>	<i>A</i>	<i>m</i>
2 x 0,75	14	5,9	51	26,0	6	100
2 x 1,00	19	6,3	59	19,5	10	100
2 x 1,50	29	7,2	80	13,3	16	100
2 x 2,50	48	8,9	124	7,98	25	100
2 x 4,00	77	10,1	170	4,95	32	100
3 x 0,75	22	6,3	60	26,0	6	100
3 x 1,00	30	6,7	71	19,5	10	100
3 x 1,50	43	7,9	100	13,3	16	100
3 x 2,50	72	9,6	155	7,98	25	100
3 x 4,00	115	10,9	215	4,95	32	100
4 x 0,75	29	6,8	73	26,0	6	100
4 x 1,00	38	7,5	89	19,5	10	100
4 x 1,50	58	8,8	126	13,3	16	100
4 x 2,50	96	10,5	189	7,98	20	100
4 x 4,00	154	11,9	264	4,95	32	100
5 x 0,75	36	7,7	92	26,0	10,5	100
5 x 1,00	48	8,2	108	18,5	12	100
5 x 1,50	72	9,8	158	13,3	13,5	100
5 x 2,50	120	11,7	240	7,98	19,5	100
5 x 4,00	192	13,5	336	4,95	32	100



# BIRKABLO SIGNAL CABLES

## LIYCY

- 1-Stranded multiwire copper conductor
- 2-Coloured PVC insulation
- 3-Polyester tape
- 4-Braided tinned copper wire screen (min. 50% coverage)
- 5-PVC sheath (Grey and Black)



## SHIELDED (LIYCY)

### Construction

Multiple wire copper conductor, PVC insulated, core or pair stranded, retaining and protective feature polyester tape covered (optional), with braided tinned copper wire screen (min. 50% covering), outer sheath thickness according to TS 13755, gray colored PVC outer sheathed signal and control cables.

Temp. for stationary condition : -30 °C, +70 °C

Temp. for moving condition : -5 °C, +50 °C

These cables are used indoors as data transmission cables in automation systems and in the electronic control systems.

LIYCY SIGNAL CABLE	
2 CORES	3 CORES
2 X 0,50	3 X 0,50
2 X 0,75	3 X 0,75
2 X 1,00	3 X 1,00
2 X 1,50	3 X 1,50



# BIRKABLO SIGNAL CABLES

## LIHCH

- 1-Stranded multiwire copper conductor
- 2-Coloured LSOH insulation
- 3-Polyester tape
- 4-Braided tinned copper wire screen (min. 50% coverage)
- 5-Grey LSOH sheath



## HFFR (LIHCH) - HALOGEN FREE

### Construction

The cable consists of stranded multiwire copper conductors and LSOH insulation. The cable core consists of insulated conductors or pairs laid up in layers and a polyester tape is wrapped and a tinned copper braid (min. 50% coverage) is applied over the core. Then a grey LSOH sheath is applied on the screened cable core. Then a grey LSOH sheath is applied on the screened cable core. Outer sheath thickness according to ÜBM-03-BK-022.

Temp. for stationary condition : -30 °C, +70 °C  
Temp. for moving condition : -5 °C, +50 °C

These cables are used indoors as data transmission cables in automation systems and in the electronic control systems.

### HFFR (LIHCH) SIGNAL CABLE

LIHCH 2\*1,00 SIGNAL CABLE

LIHCH 2\*1,50 SIGNAL CABLE



# BIRKABLO

## H05V-U/H07V-U/H07V-R CABLES (NYA)

H05V-U (NYA) 300/500 V TS EN 50525-2-31


H07V-U (NYA) 450/750 V TS EN 50525-2-31

H07V-R (NYA) 450/750 V TS EN 50525-2-31

1- Fine-stranded Cu-conductor

2- (PVC) insulation

3- (PVC) outer sheath

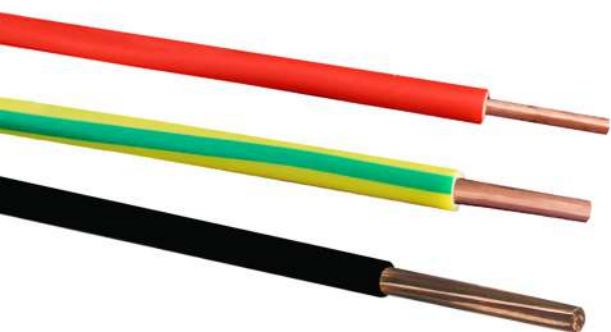

### Insulated Harmonized Wires

#### Construction

(PVC) insulated wires with solid or stranded copper conductors.

#### Technical Data

These cables are produced according to above standards as single core. - Permissible operating temperature: 70 °C


#### Applications

Used in covered, dry places, in fixed plants, in distribution panels, on and under plaster as laid in conduit or on insulating support.

#### NYA (H07V-U) SINGLE CABLE

NYA 1,50 MM2 SINGLE CABLE

NYA 2,50 MM2 SINGLE CABLE

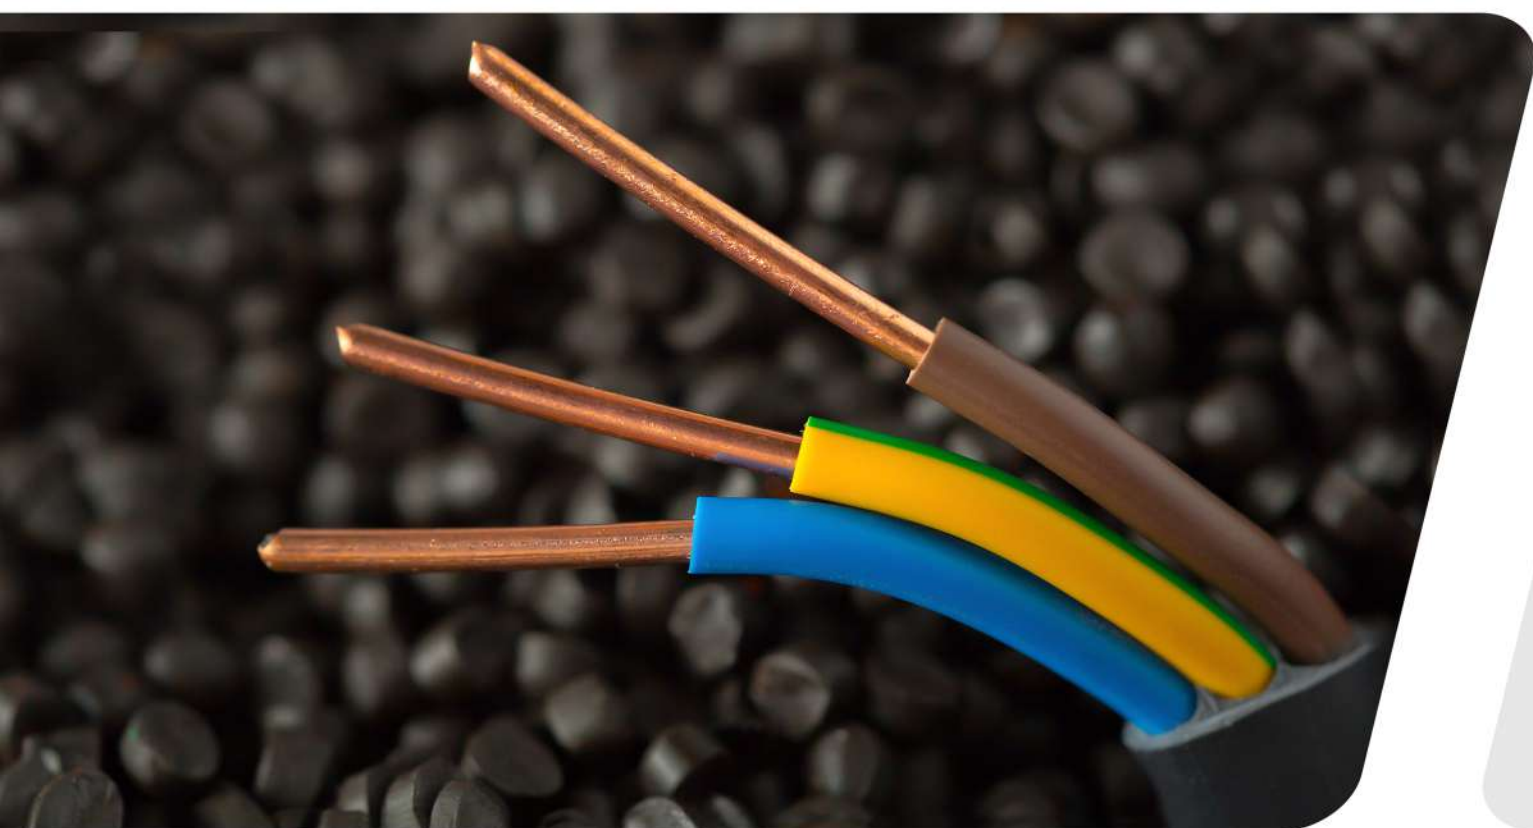

# BIRKABLO

## H05V-K/H07V-K CABLES (NYAF)

H05V-U (NYA) 300/500 V TS EN 50525-2-31  
H07V-U (NYA) 450/750 V TS EN 50525-2-31

1- Fine-stranded Cu-conductor

2- (PVC) insulation



HFFR (LIHCH) - Halogen Free

### Construction

Multicore flexible cables with fine stranded copper conductors, (PVC) insulation and (PVC) sheath.

### Technical Data

These cables are produced according to above standards.

- Permissible operating temperature: 70 °C
- Color of outer sheath: White and black

### Applications

Used in covered and dry places where the mechanical stresses exist, on household appliances, in damp and steamed areas.

#### NYAF (H05V-K , H07V-K) CABLE

NYAF 0,50 MM2 CABLE

NYAF 0,75 MM2 CABLE

NYAF 1,00 MM2 CABLE

NYAF 1,50 MM2 CABLE

NYAF 2,50 MM2 CABLE

NYAF 4,00 MM2 CABLE





**WEBSITE:**

[www.briscool.com.tr](http://www.briscool.com.tr)



[instagram.com/briscoolhvac](https://www.instagram.com/briscoolhvac)

**Mail:**

[export@briscool.com.tr](mailto:export@briscool.com.tr)



[linkedin.com/briscoolhvac](https://www.linkedin.com/briscoolhvac)

**Phone:**

+90 542 679 18 40



[facebook.com/briscoolhvac](https://www.facebook.com/briscoolhvac)

**ADDRESS:**

Toros Mah. Ahmet Sapmaz Bulvarı, Bora  
Plaza Altı, No:41/2-A Çukurova / ADANA / TURKEY

**Phone:**

+90 322 224 39 56  
+90 322 224 39 66